(54) Title: METHOD AND APPARATUS FOR DISPLAYING A VIRTUAL WORLD

(57) Abstract

A database (56) stores image data corresponding to an image which extends along first and second generally perpendicular image axes. A display device (14) is mounted for movement with the user's head in proximity to the user's eye, and an image generating circuit (54) generates a portion of the image on the display device (14) using coordinate data which varies only for the first and second image axes. A movement measuring circuit (58) includes a plurality of radiation emitters disposed about the person's body part and a sensor (38) disposed at a fixed reference point which detects the identity of the radiation emitters and/or the intensity of radiation emitted by each emitter.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo		of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
CM	Cameroon	LI	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

1

METHOD AND APPARATUS FOR DISPLAYING A VIRTUAL WORLD

5   BACKGROUND OF THE INVENTION
        This invention relates to virtual reality systems and,
more particularly, to an apparatus for displaying a virtual
world.
        Virtual reality systems use computers and peripheral
10   devices to enable users to perceive and interact with computer
generated worlds. In a typical virtual reality system, a user
wears garments outfitted with devices which provide information
about the position and orientation of the user relative to a
fixed reference point. The information is used by the computer
15   system to create a virtual being, wherein the virtual being
emulates the position, orientation, and movements of the user.
The database also includes a virtual environment in which the
virtual being exists, and the virtual being may act upon
virtual objects in the virtual world in a manner which emulates
20   the actions of the user. For example, the virtual being may
pick up a virtual ball and throw it, or the virtual being may
use a virtual knife to cut a virtual steak.
        To allow the user to perceive the virtual world and
the actions his or her virtual being within it, the computer
25   animates the virtual world together with the virtual being and
projects the virtual world from the viewpoint of the virtual
being onto a head-mounted display. As the user moves around, his
or her actions are sensed by the instrumented garment and used
by the computer to alter the position and orientation of the
30   virtual being within the virtual world. The displayed image is
also modified to follow the viewpoint of the virtual being so
that the user is led to believe he or she actually exists in the
virtual world. Thus, a user may lower his or her head and look
underneath a virtual table, or the user may walk over to a

2

virtual light switch and, by appropriate movements of the user's
hand, turn the switch on and off.

An important feature in any virtual reality system is
the ability to animate and display the virtual world in a manner
5   which makes the user believe he or she actually exists within
the virtual world. For example, the displayed image must
realistically translate and rotate as the user's head translates
and rotates. Consequently, virtual worlds are usually rendered
using a database which stores data for all three dimensions for
10   every structure in the virtual world, and the structures are
positioned, translated and rotated accordingly. Unfortunately,
translation and rotation of structures in three-dimensional
space, assignment of pixel values to correspond with the three
dimensional view, and generation of the image on the head
15   mounted display in real time requires substantial computing
resources. This makes virtual reality systems very expensive
and beyond the general consumer market.

SUMMARY OF THE INVENTION

20
The present invention is directed to a method and
apparatus for displaying a virtual world which reduces the
amount of computing resources needed to display the virtual
world by rendering the virtual world using a reduced amount of
25   image data. In one embodiment of the present invention, a
database stores image data corresponding to an image which
extends along first and second generally perpendicular image
axes. A display device is mounted for movement with the user's
head in proximity to the user's eye, and an image generating
30   circuit generates a subportion of the image on the display
device using coordinate data which varies only for the first and
second image axes. A movement measuring circuit measures
movement of a user's body part, such as the user's head, and, as
the user moves (e.g., rotates his or her head), the image
35   displayed is translated along one of the first or second image

3

axes by an amount proportional to the amount of movement. For example, if the user rotates his or her head about a vertical axis, the displayed image translates along the horizontal axis. The begin and end points of the image are logically coupled for forming a continuous 360· image. Thus, if the user rotates his or her head in a circle, he or she will view a continuous "cylindrical" world. The cylindrical world adequately simulates a three-dimensional virtual world, but without complicated and expensive three-dimensional graphics processing.

In the preferred embodiment, the display device comprises first and second display screens, one for each eye. The image displayed to one eye is offset by the image displayed to the other eye for providing a sense of depth. Multiple images may be superimposed on each other, each having a different offset, to further simulate a three dimensional environment.

The movement measuring circuit may comprise a plurality of radiation emitters disposed about the person's body part and a sensor disposed at a fixed reference point which detects the identity of the radiation emitters and/or the intensity of radiation emitted by each emitter. As the user rotates his or her body part, the sensor detects radiation from whichever radiation emitter is within view. The identity of the radiation emitters from which radiation is sensed may be used to calculate the rotational position and/or velocity of the user's body part. This data, in turn, may be used for translating the image on the display. Alternatively, a plurality of sensors may encircle the user's body part for sensing radiation emitted from a single radiation emitter. The identity of the sensors which receive radiation and/or the intensity of radiation received by the various sensors may be used to calculate the position and rotational velocity of the user's body part.

BRIEF DESCRIPTION OF THE DRAWINGS

4

Figure 1 is a diagram of portions of a virtual reality system including a particular embodiment of an apparatus according to the present invention for displaying a virtual world;

Figure 2 is a diagram of a particular embodiment of a two dimensional image displayed by the apparatus of Figure 1;

Figure 3 is a diagram showing how a portion of the image of Figure 2 is generated using graphical characters;

Figure 4 is a diagram showing how the virtual world is displayed to the user as a single cylinder;

Figure 5 is a diagram showing how the virtual world is displayed to each of the user's eyes;

Figure 6 is a diagram showing how the apparatus according to the present invention displays a virtual world comprising a plurality of superimposed cylinders;

Figures 7A, 7B, 8A, 8B, 8C, 9A and 9B are diagrams showing particular embodiments of movement measuring circuits according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 is a diagram of relevant portions of a virtual reality system 10 which incorporates features of the present invention. Virtual reality system 10 includes a head mounted display 14 for displaying images of a virtual world, position/tilt headgear 34 and a sensor 38 for providing data used for measuring the rotational position and velocity of the user's head about a horizontal X-axis 40 and a vertical Z-axis 42, a processor 50 for rendering the images in accordance with the data from headgear 34 and sensor 38, and a control unit 26 for interfacing head mounted display 14, headgear 34 and sensor 38 to processor 50. Head mounted display 14 is coupled to control unit 26 through a communication path 30, headgear 34 is coupled to control unit 26 through a communication path 42, sensor 38 is coupled to control unit 26 through a communication

path 46, and control unit 26 is coupled to processor 50 through communication paths 62 and 66.

Head mounted display 14 includes display screens 18 and 22 disposed in front of the user's eyes for displaying separate but overlapping images of the virtual world to each eye. Processor 50 includes an image generator 54, an image database 56, and a position/velocity calculating circuit 58. Position/velocity calculating circuit 58 receives the data from headgear 34 and sensor 38 through communication path 62 and calculates the rotational position and velocity of the user's head about axes 40 and 42. Image generator 54 uses the position and velocity calculations from position/velocity calculating circuit 58 in conjunction with the image data stored in image database 56 to render portions of the image which then may be communicated to control unit 26 through communication path 66 and thereafter to head mounted display 14 through communication path 30.

Figure 2 is a diagram showing a particular embodiment of an image 70 which may be stored in image data base 56. Image 70 extends along a horizontal X' axis 68 and a vertical Z' axis 70 as shown. In this embodiment, image 70 comprises a plurality of multi-pixel blocks of graphical characters 72(1,1) through 72(J,K), and the graphical characters extend from an address ADDR-1 to an address ADDR-K. Of course, the graphical characters need not be stored in contiguous physical locations within image data base 56 as long as the appropriate address pointers are capable of grouping the graphical characters together to form each displayed frame. Furthermore, there is not necessarily a one-to-one correspondence between the address number and the character number. The numbers used herein are for convenience in understanding only.

Image database also stores "sprites," such as sprite 80, which may be superimposed on image 70 in any desired location. Unlike image 70, sprites ordinarily comprise bit-mapped images rather than graphical characters, and they may be

6

superimposed on image 70 at any pixel location (ie., they need
not be placed at character boundaries).

In this embodiment, M horizontal graphical characters
and L vertical graphical characters comprise each displayed
5   frame, where typically L<<K and M<<J. See Fig. 3. As the user
rotates his or her head about X axis 40 and/or Z axis 42, the
portions of the image displayed on display screens 18 and 22
change accordingly. Thus, as the user rotates his or her head
about Z axis 42, image generator 54 may initially display the
10   image located between addresses ADDR-1 and ADDR-M and then
scroll to the image located between addresses ADDR-N and ADDR-
(M+N). Preferably, the scrolling velocity is proportional to
the rotational velocity of the user's head about the relevant
axis.

15   Since the user may rotate his or her head more than
360·, it is necessary to accommodate this rotation by logically
coupling the beginning address of the image (ADDR-1) to the end
address of the image (ADDR-K) so that image generator renders a
continuous "cylindrical" image as shown in Figs. 4-6. In this
20   embodiment, the image at ADDR-1 through ADDR-M and ADDR-(J-M)
through ADDR-J are duplicated. As the user rotates his or her
head, e.g., clockwise about Z axis 42, the address pointer for
image generator 54 increments until it reaches ADDR(J-M). At
that time the address pointer value switches to ADDR(1), thus
25   simulating the continuous image. The same thing occurs when the
user rotates his or her head in the opposite direction.
Since the headgear 34 measures rotation of the user's head about
horizontal X axis 40 as well, image generator 54 may display
different vertical portions of image 70 depending on the
30   rotational position of the user's head about axis 40 as shown in
Figure 4.

In the preferred embodiment, the separate images
displayed on display screens 18 and 22 are not exactly the same.
Instead, they are offset in order to provide a stereo (depth)
35   effect. For example, as shown in Fig. 5, the portion of the

7

image from ADDR(N) through ADDR(M+N) may be displayed to the
user's left eye on display screen 22, while the portion of the
image from ADDR(N+1) through ADDR(M+N+1) may be displayed to the
user's right eye on display screen 18. Preferably, the images
5   are offset by an integral number of graphical characters. The
amount of separation may be set to control the perceived depth
of the image. The further apart the images are, the closer the
perceived image.

The foregoing may be extended to the maintenance of
10 multiple images in one or more data bases for the generation of
superimposed cylinder worlds. As shown in Fig. 6, multiple
images may be superimposed where the offset for one image
differs from the offset of another image. The image having the
greater offset will appear closer. The composite image will
15 appear three-dimensional, but without using a three-dimensional
data base or three-dimensional graphics processing.

Figures 7A, 7B, 8A, 8B, 8C, 9A and 9B show various
embodiments of those portions of headgear 34 used for measuring
rotation about Z axis 42. Figure 7A shows an embodiment wherein
20 a plurality, e.g., three radiation emitters 100(A-C) encircle
the user's head, preferably in a common plane. Each radiation
emitter may emit radiation at different frequencies, or else the
individual radiation emitters may be selectively turned on and
off so that the identity of the emitters may be ascertained
25 using sensor 38 which is disposed generally perpendicular to the
vertical axis of rotation. In the embodiment shown in Figure
7A, sensor 38 senses the intensity of radiation received from
radiation emitters 100, 102 and 104 to determine which radiation
emitter is in view of sensor 38 and which radiation emitter is
30 closest to sensor 38. As shown in Figure 7B, the intensity of
radiation received from radiation emitter 100 is less than the
intensity of radiation received from emitter 102, and no
radiation is sensed from emitter 104. This data may be used to
calculate the rotational position of the user's head about Z
35 axis 42.

8

Figures 8A, 8B and 8C show another embodiment of headgear 34 wherein numerous radiation emitters 102A-L encircle the user's head. This device may operate the same way as the device shown in Figure 7A wherein the identity of and intensity from the various radiation emitters are used to calculate the rotational position of the user's head. Alternatively, since many radiation emitters are disposed about the user's head, the rotational position of the user's head may be accurately ascertained merely by identifying which radiation emitter is in view.

Figures 9A, 9B, and 9C show another embodiment of a rotation measuring device similar to the device shown in Figure 8A, except a plurality of radiation sensors encircle the user's head for sensing radiation from a single radiation emitter 112. As shown in Figure 9B, the intensity of radiation received by each sensor together with its identity may be used to ascertain the rotational position of the user's head. Alternatively, as in the embodiment shown in Figure 8A, the rotational position of the user's head may be ascertained by the identity of sensors which receive any radiation at all from emitter 38A as shown in Figure 9C.

In all embodiments the rotational velocity of the user's head may be measured by the rate of change in amplitude of the sensed radiation or by the rate of change of the identified sensors. Alternatively, force-sensitive resistors may be used to measure torque and hence acceleration and velocity. Backup sensors (e.g., in the form of additional radiation emmiters and sensors) may be employed to prevent false indications of motion or no motion under constant acceleration conditions.

The same schemes may be used to calculate the rotational position and velocity of the user's head about X axis 40. However, in this embodiment a pitch sensor 120 is used to measure the degree of pitch of the user's head. Pitch sensor 120 may comprise a conventional bead sensor which employs

gravity to measure the degree of pitch, or some other well-known pitch sensor.

　　　　While the above is a complete description of a preferred embodiment of the present invention, various
5   modifications may be employed. For example, any body part of the user may be used to control scrolling of the image (such as the user's hand). Consequentially, the scope of the invention should be ascertained by the following claims.

WHAT IS CLAIMED IS:

1.   An apparatus for displaying a virtual world comprising:

image storing means for storing image data representing an image which extends along first and second generally perpendicular image axes;

movement measuring means for measuring movement of a body part of the user;

a display screen mounted for movement with the user's head in front of the user's eyes; and

image generating means, electrically coupled to the image storing means, to the movement measuring means, and to the display means, for generating a portion of the image on the display screen using coordinate data which varies only for the first and second image axes, the image generating means including image translating means for generating a portion of the image on the display screen that is translated along one of the first or second image axes by an amount proportional to an amount of movement of the user's body part.

2.   The apparatus according to claim 1 wherein the image storing means stores only a two-dimensional image comprising multi-pixel blocks of graphical characters.

3.   The apparatus according to claim 1 wherein the movement measuring means comprises rotation measuring means for measuring rotation of the user's body part, and wherein the image translating means generates a portion of the image that is translated by an amount proportional to the amount of rotation of the user's body part.

4.   The apparatus according to claim 3 wherein the first axis is a horizontal axis and the second axis is a vertical axis, and wherein the image translating means generates

·11

a portion of the image that is translated along the horizontal axis by an amount proportional to the amount of rotation of the user's body part.

5   5.   The apparatus according to claim 3 wherein the rotation measuring means comprises vertical head rotation measuring means for measuring the amount of rotation of the user's head about the vertical axis, so that the image translating means translates the portion of the image along the
10   horizontal axis by an amount proportional to the amount of rotation of the user's head about the vertical axis.

           6.   The apparatus according to claim 5 wherein the rotation means further comprises horizontal head rotation
15   measuring means for measuring the amount of rotation of the user's head about the horizontal axis, and wherein the image translating means generates a portion of the image that is translated along the vertical axis by an amount proportional to the amount of rotation of the user's head about the horizontal
20   axis.

           7.   The apparatus according to claim 3 wherein the image has a start point and an end point along the first axis, and wherein the image generating means couples the start point
25   to the end point when generating the image so that a continuous 360 degree image is displayed to the user as the user's body part rotates about the second axis.

           8.   The apparatus according to claim 7 wherein the
30   first axis is a horizontal axis and the second axis is a vertical axis, and wherein the image translating means generates a portion of the image that is translated along the horizontal axis by an amount proportional to the amount of rotation of the. user's body part about the vertical axis.

35

9.　The apparatus according to claim 8 wherein the rotation measuring means comprises vertical head rotation measuring means for measuring the amount of rotation of the user's head about the vertical axis, so that the portion of the image is translated along the horizontal axis by an amount proportional to the amount of rotation of the user's head about the vertical axis.

10.　The apparatus according to claim 9 wherein the rotation means further comprises horizontal head rotation measuring means for measuring the amount of rotation of the user's head about the horizontal axis, and wherein the image translating means generates a portion of the image that is translated along the vertical axis by an amount proportional to the amount of rotation of the user's head about the horizontal axis.

11.　The apparatus according to claim 10 wherein the image storing means stores only a two-dimensional representation of the image comprising multi-pixel blocks of graphical characters.

12　A method for displaying a virtual world comprising:

storing image data representing an image which extends along first and second generally perpendicular image axes;

measuring movement of a body part of the user;

mounting a display screen for movement with the user's head in front of the user's eyes;　and

generating a portion of the image on the display screen using coordinate data which varies only for the first and second image axes, the portion of the image being translated along one of the first or second image axes by an amount proportional to an amount of movement of the user's body part.

13

13.   The method according to claim 12 wherein the image data storing step comprises the step of storing only a two-dimensional image comprising multi-pixel blocks of graphical characters.

5

14.   The method according to claim 12 wherein the movement measuring step comprises the step of measuring rotation of the user's body part, and wherein the image generating step comprises the step of generating a portion of the image that is translated by an amount proportional to the amount of rotation of the user's body part.

10

15.   The method according to claim 14 wherein the first axis is a horizontal axis and the second axis is a vertical axis, and wherein the image generating step further comprises the step of generating a portion of the image that is translated along the horizontal axis by an amount proportional to the amount of rotation of the user's body part.

15

20

16.   The method according to claim 15 wherein the rotation measuring step further comprises the step of measuring the amount of rotation of the user's head about the vertical axis, and wherein the image generating step further comprises the step of generating a portion of the image that is translated along the horizontal axis by an amount proportional to the amount of rotation of the user's head.

25

17.   The method according to claim 16 wherein the rotation measuring step further comprises the step of measuring the amount of rotation of the user's head about the horizontal axis, and wherein the image generating step comprises the step of generating a portion of the image that is translated along the vertical axis by an amount proportional to the amount of rotation of the user's head about the horizontal axis.

30

35

14

18.   The method according to claim 14 wherein the image has a start point and an end point along the first axis, and wherein the image generating step further comprises the step of coupling the start point to the end point when generating the image so that a continuous 360 degree image is displayed to the user as the user's body part rotates about the second axis.

19.   The method according to claim 18 wherein the first axis is a horizontal axis and the second axis is a vertical axis, and wherein the image generating step further comprises the step of generating a portion of the image that is translated along the horizontal axis by an amount proportional to the amount of rotation of the user's. body part.

20.   The method according to claim 19 wherein the rotation measuring step comprises the step of measuring the amount of rotation of the user's head about the vertical axis, and wherein the image generating step further comprises the step of generating a portion of the image that is translated along the horizontal axis by an amount proportional to the amount of rotation of the user's head about the vertical axis.

21.   The method according to claim 20 wherein the rotation measuring step further comprises the step of measuring the amount of rotation of the user's head about the horizontal axis, and wherein the image generating step further comprises the step of generating a portion of the image that is translated along the vertical axis by an amount proportional to the amount of rotation of the user's head about the horizontal axis.

22.   The method according to claim 21 wherein the image storing step comprises the step of storing only a two-dimensional representation of the image comprising multi-pixel blocks of graphical characters.

15

23.   An apparatus for displaying a virtual world comprising:

image storing means for storing image data representing a first image which extends along first and second generally perpendicular image axes;

movement measuring means for measuring movement of a body part of the user;

first and second display screens mounted for movement with the user's head, the first display screen being disposed in front of a first one of the user's eyes, and the second display screen being disposed in front of a second one of the user's eyes;   and

image generating means, electrically coupled to the image storing means, to the movement measuring means, to the first display screen, and to the second display screen, for generating a portion of the first image on the first and second display screens using coordinate data which varies only for the first and second image axes, the image generating means including image translating means for generating a portion of the first image on the first and second display screens that is translated along one of the first or second image axes by an amount proportional to an amount of movement of the user's body part.

24.   The apparatus according to claim 23 wherein the portion of the first image generated on the first display screen is offset from the portion of the first image generated on the second display screen.

25.   The apparatus according to claim 24 wherein the image storing means stores only a two-dimensional images comprising multi-pixel blocks of graphical characters, and wherein the portion of the first image generated on the first display screen is offset along the first axis from the portion

16

of the first image generated on the second display screen by a
first selected number of graphical characters.

26.   The apparatus according to claim 25 wherein the
image storing means additionally stores image data representing
a second image which extends along the first and second image
axes, wherein the image generating means generates a portion of
the second image on the first and second display screens using
coordinate data which varies only for the first and second image
axes, the second image being superimposed on the first image,
wherein the image translating means generates a portion of the
second image on the first and second display screens that is
translated along one of the first or second image axes by an
amount proportional to an amount of movement of the user's body
part, and wherein the portion of the second image generated on
the first display screen is offset from the portion of the
second image generated on the second display screen by a second
selected number of graphical characters, the second number being
different from the first number.

27.   The apparatus according to claim 26 wherein the
movement measuring means comprises rotation measuring means for
measuring rotation of the user's body part, and wherein the
image translating means generates portions of the first and
second image that are translated by an amount proportional to
the amount of rotation of the user's body part.

28.   The apparatus according to claim 27 wherein the
first axis is a horizontal axis and the second axis is a
vertical axis, and wherein the image translating means generates
portions of the first and second images that are translated
along the horizontal axis by an amount proportional to the
amount of rotation of the user's body part.

29. The apparatus according to claim 28 wherein the rotation measuring means comprises vertical head rotation measuring means for measuring the amount of rotation of the user's head about the vertical axis, so that the image translating means generates portions of the first and second images that are translated along the horizontal axis by an amount proportional to the amount of rotation of the user's head about the vertical axis.

30. The apparatus according to claim 29 wherein the rotation means further comprises horizontal head rotation measuring means for measuring the amount of rotation of the user's head about the horizontal axis, and wherein the image translating means generates portions of the first and second images that are translated along the vertical axis by an amount proportional to the amount of rotation of the user's head about the horizontal axis.

31. The apparatus according to claim 27 wherein the first and second images each have a start point and an end point along the first axis, and wherein the image generating means couples the start point in the first and second images to the respective end points when generating the first and second images so that continuous 360 degree first and second images are displayed to the user as the user's body part rotates about the second axis.

32. The apparatus according to claim 31 wherein the first axis is a horizontal axis and the second axis is a vertical axis, and wherein the image translating means generates portions of the first and second images that are translated along the horizontal axis by an amount proportional to the amount of rotation of the user's body part.

18

33.   The apparatus according to claim 32 wherein the
rotation measuring means comprises vertical head rotation
measuring means for measuring the amount of rotation of the
user's head about the vertical axis, so that the image
5   translating means generates portions of the first and second
images that are translated along the horizontal axis by an
amount proportional to the amount of rotation of the user's head
about the vertical axis.

10   34.   The apparatus according to claim 33 wherein the
rotation means further comprises horizontal head rotation
measuring means for measuring the amount of rotation of the
user's head about the horizontal axis, and wherein the image
translating means generates portions of the images that are
15   translated along the vertical axis by an amount proportional to
the amount of rotation of the user's head about the horizontal
axis.

35.   The apparatus according to claim 34 wherein the
20   image storing means stores a bit map of a third image, wherein
the image generating means generates the third image on the
first and second display screens and superimposes the third
image on at least one of the first and second images, and
wherein the portion of the third image generated on the first
25   display screen is offset along the first axis from the portion
of the third image generated on the second display screen by a
selected number of pixels.

36.   A method for displaying a virtual world
30   comprising the steps of:
storing image data representing a first image which
extends along first and second generally perpendicular image
axes;
measuring movement of a body part of the user;

mounting first and second display screens for movement
with the user's head, the first display screen being disposed in
front of a first one of the user's eyes, and the second display
screen being disposed in front of a second one of the user's

5   eyes; and

generating a portion of the first image on the first
and second display screens using coordinate data which varies
only for the first and second image axes, the portion of the
first image on the first and second display screens being

10   translated along one of the first or second image axes by an
amount proportional to an amount of movement of the user's body
part.

37.   The method according to claim 36 wherein the

15   portion of the first image generated on the first display screen
is offset from the portion of the first image generated on the
second display screen.

38.   The method according to claim 37 wherein the

20   image storing step comprises the step of stores only a two-
dimensional images comprising multi-pixel blocks of graphical
characters, and wherein the portion of the first image generated
on the first display screen is offset from the portion of the
first image generated on the second display screen by a first

25   selected number of graphical characters.

39.   The apparatus according to claim 38 wherein the
image storing step further comprises the step of additionally
storing image data representing a second image which extends

30   along the first and second image axes,   wherein the image
generating step further comprises the step of generating a
portion of the second image on the first and second display
screens using coordinate data which varies only for the first
and second image axes, the second image being superimposed on

35   the first image, the portion of the second image on the first

20

and second display screens being translated along one of the first or second image axes by an amount proportional to an amount of movement of the user's body part, and wherein the portion of the second image generated on the first display

5   screen is offset from the portion of the second image generated on the second display screen by a second selected number of graphical characters, the second number being different from the first number.

10   40.   The method according to claim 39 wherein the movement measuring step comprises the step of measuring rotation of the user's body part, and wherein the image generating step further comprises the step of generating portions of the first and second image that are translated by an amount proportional

15   to the amount of rotation of the user's body part.

            41.   The method according to claim 40 wherein the first axis is a horizontal axis and the second axis is a vertical axis, and wherein the image generating step further

20   comprises the step of generating portions of the first and second images that are translated along the horizontal axis by an amount proportional to the amount of rotation of the user's body part.

25   42.   The method according to claim 41 wherein the rotation measuring step comprises further comprises the step of measuring the amount of rotation of the user's head about the vertical axis, and wherein the image geerating step further comprises the step of generating portions of the first and

30   second images that are translated along the horizontal axis by an amount proportional to the amount of rotation of the user's head about the vertical axis.

            43.   The method according to claim 42 wherein the

35   rotation measuring step further comprises the step of measuring

the amount of rotation of the user's head about the horizontal axis, and wherein the image generating step further comprises the step of generating portions of the first and second images that are translated along the vertical axis by an amount proportional to the amount of rotation of the user's head about the horizontal axis.

44.   The method according to claim 40 wherein the first and second images each have a start point and an end point along the first axis, and wherein the image generating step further comprises the step of coupling the start point in the first and second images to the respective end points so that continuous 360 degree first and second images are displayed to the user as the user's body part rotates about the second axis.

45.   The method according to claim 44 wherein the first axis is a horizontal axis and the second axis is a vertical axis, and wherein the image generating step further comprises the step of generating portions of the first and second images that are translated along the horizontal axis by an amount proportional to the amount of rotation of the user's body part.

46.   The method according to claim 45 wherein the rotation measuring step further comprises the step of measuring the amount of rotation of the user's head about the vertical axis, and wherein the image generating step further comprises the step of generating portions of the first and second images that are translated along the horizontal axis by an amount proportional to the amount of rotation of the user's head about the vertical axis.

47.   The method according to claim 46 wherein the rotation measuring step further comprises the step of measuring the amount of rotation of the user's head about the horizontal

axis, and wherein the image generating step further comprises
the step of generating portions of the images that are
translated along the vertical axis by an amount proportional to
the amount of rotation of the user's head about the horizontal
5   axis.

48.   The method according to claim 47 wherein the
image storing step further comprises the step of storing a bit
map of a third image, wherein the image generating step further
10   comprises the step of generating the third image on the first
and second display screens and superimposing the third image on
at least one of the first and second images, and wherein the
portion of the third image generated on the first display screen
is offset along the first axis from the portion of the third
15   image generated on the second display screen by a selected
number of pixels.

49.   An   apparatus   for   measuring   positional
characteristics of a body comprising:
20   a plurality of radiation emitters encircling the body;
a radiation sensor positioned for sensing radiation
from different ones of the plurality of emitters depending upon
a radial position of the body about an axis; and
positional   characteristic   measuring   means   for
25   measuring positional characteristics of the body about the axis,
the positional characteristic measuring means comprising:
first   emitter   identifying   means,   electrically
coupled to the sensor, for identifying the emitters
for which radiation is being sensed by the sensor at
30   a first time; and
first   position   calculating   means,   electrically
coupled   to   the   emitter   identifying   means,   for
calculating a first radial position of the body about
the axis based on the identified emitters.

35

23

50.   The apparatus according to claim 49 wherein the positional characteristic measuring means further comprises:

first amplitude measuring means, electrically coupled to the sensor, for measuring the amplitude of radiation sensed for each identified emitter at the first time; and

wherein the first position calculating means is electrically coupled to the first amplitude measuring means for calculating the first radial position of the body about the axis based on the amplitude of radiation sensed for each identified emitter at the first time.

51.   The apparatus according to claim 49 wherein the positional characteristic measuring means further comprises:

second emitter identifying means for identifying the emitters for which radiation is being sensed by the sensor at a second time; and

velocity calculating means, electrically coupled to the first emitter identifying means and to the second emitter identifying means, for calculating rotational velocity of the body about the axis based on the emitters identified at the first and second times.

52.   The apparatus according to claim 51 wherein the positional characteristic measuring means further comprises:

second amplitude measuring means, electrically coupled to the sensor, for measuring the amplitude of radiation sensed for each identified emitter at the second time; and

wherein the velocity calculating means is electrically coupled to the second amplitude measuring means for calculating the rotational velocity of the body about the axis based on the amplitude of radiation sensed for each identified emitter at the first and second times.

53.   The apparatus according to claim 52 wherein the sensor is disposed generally perpendicularly to the axis.

24

54. The apparatus according to claim 53 wherein the plurality of emitters generally lie within a common plane.

55. The apparatus according to claim 54 wherein the plurality of emitters are disposed on a headpiece adapted to be worn by a person.

56. The apparatus according to claim 55 wherein each radiation emitter emits radiation having a different frequency.

57. A method for measuring positional characteristics of a body comprising the steps of:
        encircling the body with a plurality of radiation emitters;
        positioning a radiation sensor for sensing radiation from different ones of the plurality of emitters depending upon a radial position of the body about an axis;
        identifying the emitters for which radiation is being sensed by the sensor at a first time; and
        calculating a first radial position of the body about the axis based on the identified emitters.

58. The method according to claim 57 further comprising the step of measuring the amplitude of radiation sensed for each identified emitter at the first time, and wherein the first position calculating step comprises the step of calculating the first radial position of the body about the axis based on the amplitude of radiation sensed for each identified emitter at the first time.

59. The method according to claim 57 further comprising the steps of:
        identifying the emitters for which radiation is being sensed by the sensor at a second time; and

calculating rotational velocity of the body about the axis based on the emitters identified at the first and second times.

5   60.   The method according to claim 59 further comprising the step of measuring the amplitude of radiation sensed for each identified emitter at the second time, and wherein the velocity calculating step further comprises the step of calculating the rotational velocity of the body about the
10   axis based on the amplitude of radiation sensed for each identified emitter at the first and second times.

           61.   The method according to claim 60 wherein the sensor is positioned generally perpendicularly to the axis.
15

           62.   The method according to claim 61 wherein the plurality of emitters generally lie within a common plane.

           63.   The method according to claim 62 wherein the
20   plurality of emitters are disposed about the head of a person.

           64.   The method according to claim 63 wherein each radiation emitter emits radiation having a different frequency.

25   65.   An   apparatus   for   measuring   positional characteristics of a body comprising:
                   a radiation emitter;
                   a plurality of radiation sensors encircling the body, the sensors being positioned so that selected ones of the
30   plurality of radiation sensors sense radiation from the emitter depending upon a radial position of the body about an axis;
                   positional   characteristic   measuring   means   for measuring positional characteristics of the body about the axis, the positional characteristic measuring means comprising:

26

first sensor identifying means, electrically
coupled to the plurality of sensors, for identifying
the sensors which sense radiation from the emitter at
a first time; and

5   first position calculating means, electrically
coupled to the first sensor identifying means, for
calculating a first radial position of the body about
the axis based on the identified sensors.

10   66. The apparatus according to claim 65 wherein the
positional characteristic measuring means further comprises:
first amplitude measuring means, electrically coupled to the
plurality of sensors, for measuring the amplitude of radiation
sensed by each identified sensor at the first time; and

15   wherein the first position calculating means is
electrically coupled to the first amplitude measuring means for
calculating the first radial position of the body about the axis
based on the amplitude of radiation sensed for each identified
sensor at the first time.

20

67. The apparatus according to claim 65 wherein the
positional characteristic measuring means further comprises:
second sensor identifying means for identifying the
sensors which sense radiation from the emitter at a second time;

25   and
velocity calculating means, electrically coupled to
the first sensor identifying means and to the second sensor
identifying means, for calculating rotational velocity of the
body about the axis based on the sensors identified at the first

30   and second times.

68. The apparatus according to claim 67 wherein the
positional characteristic measuring means further comprises:
second amplitude measuring means, electrically coupled to the

plurality of sensors, for measuring the amplitude of radiation sensed by each identified sensor at the second time; and

wherein the velocity calculating means is electrically coupled to the second amplitude measuring means for calculating the rotational velocity of the body about the axis based on the amplitude of radiation sensed by each identified sensor at the first and second times.

69. The apparatus according to claim 68 wherein the emitter is disposed generally perpendicularly to the axis.

70. The apparatus according to claim 69 wherein the plurality of sensors generally lie within a common plane.

71. The apparatus according to claim 70 wherein the plurality of emitters are disposed on a headpiece adapted to be worn by a person.

72. A method for measuring positional characteristics of a body comprising the steps of:

positioning a radiation emitter for emitting radiation toward the body;

encircling the body with a plurality of radiation sensors so that selected ones of the plurality of radiation sensors sense radiation from the emitter depending upon a radial position of the body about an axis;

identifying the sensors which sense radiation from the emitter at a first time; and

calculating a first radial position of the body about the axis based on the identified sensors.
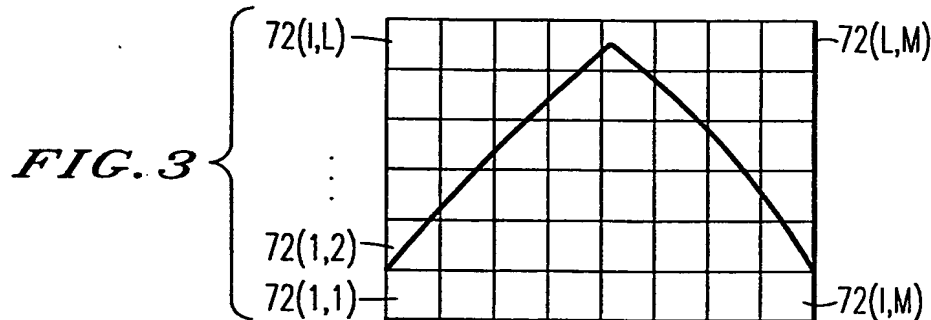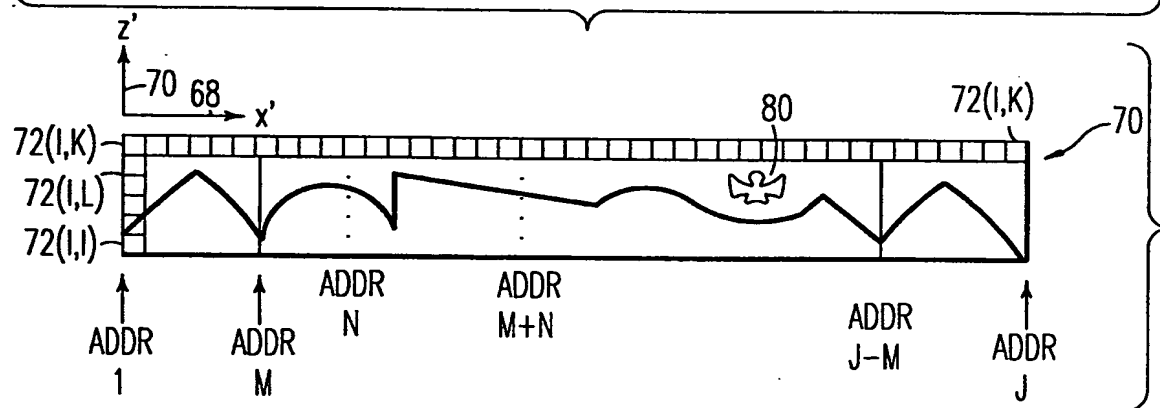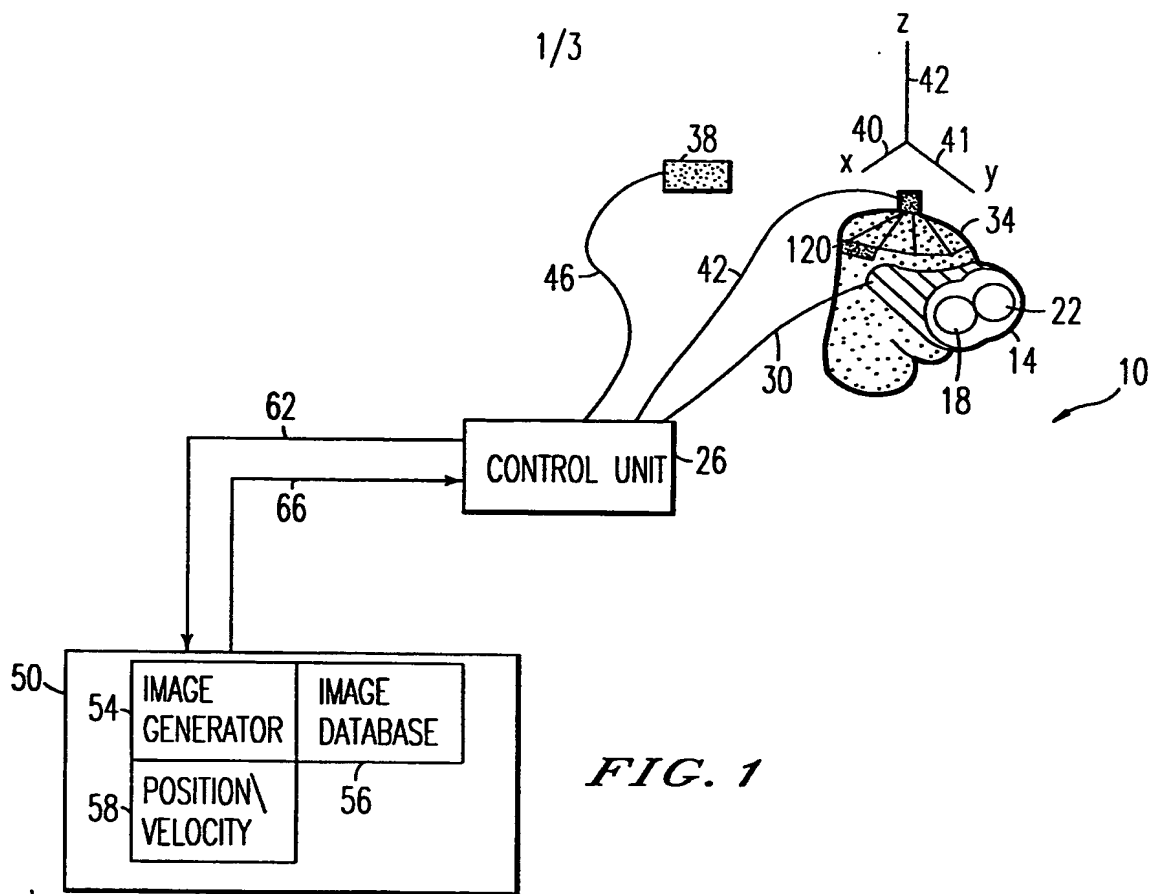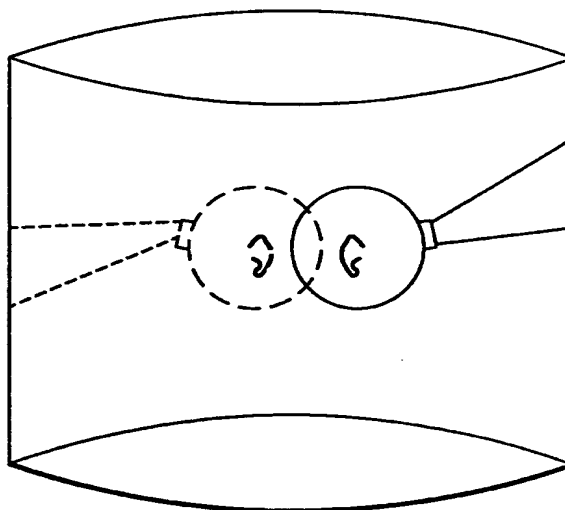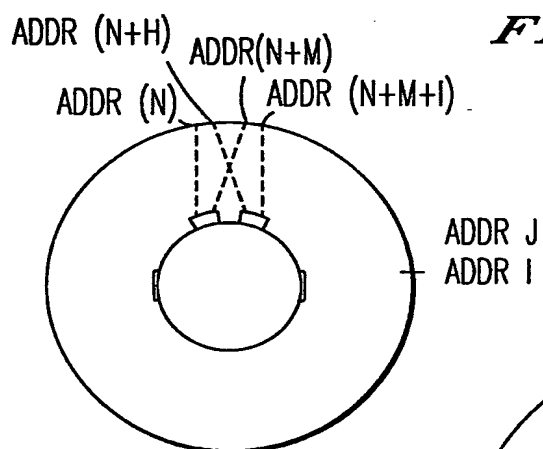
73. The method according to claim 72 further comprising the step of measuring the amplitude of radiation sensed by each identified sensor at the first time, and wherein the first position calculating step comprises the step of

28

calculating the first radial position of the body about the axis
based on the amplitude of radiation sensed by each identified
sensor at the first time.

74.   The method according to claim 72 further
comprising the steps of:
          identifying the sensors which sense radiation from the
emitter at a second time;   and
          calculating rotational velocity of the body about the
axis based on the sensors identified at the first and second
times.

75.   The method according to claim 74 further
comprising the step of measuring the amplitude of radiation
sensed by each identified sensor at the second time, and wherein
the velocity calculating step further comprises the step of
calculating the rotational velocity of the body about the axis
based on the amplitude of radiation sensed by each identified
sensor at the first and second times.

76.   The method according to claim 75 wherein the
emitter is positioned generally perpendicularly to the axis.

77.   The method according to claim 76 wherein the
plurality of sensors generally lie within a common plane.

78.   The method according to claim 77 wherein the
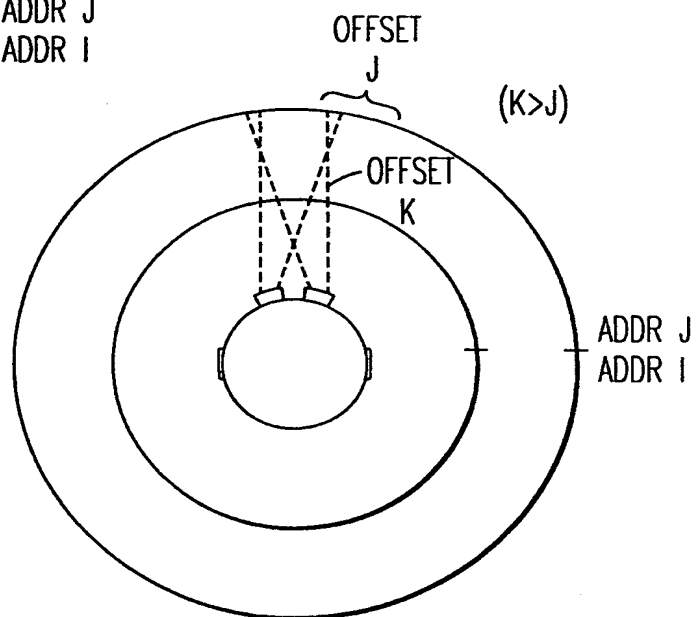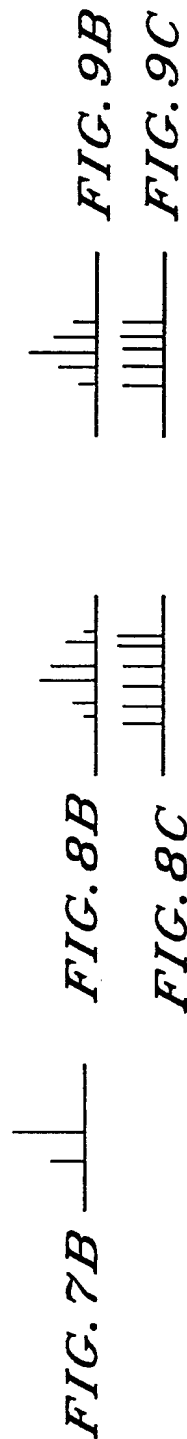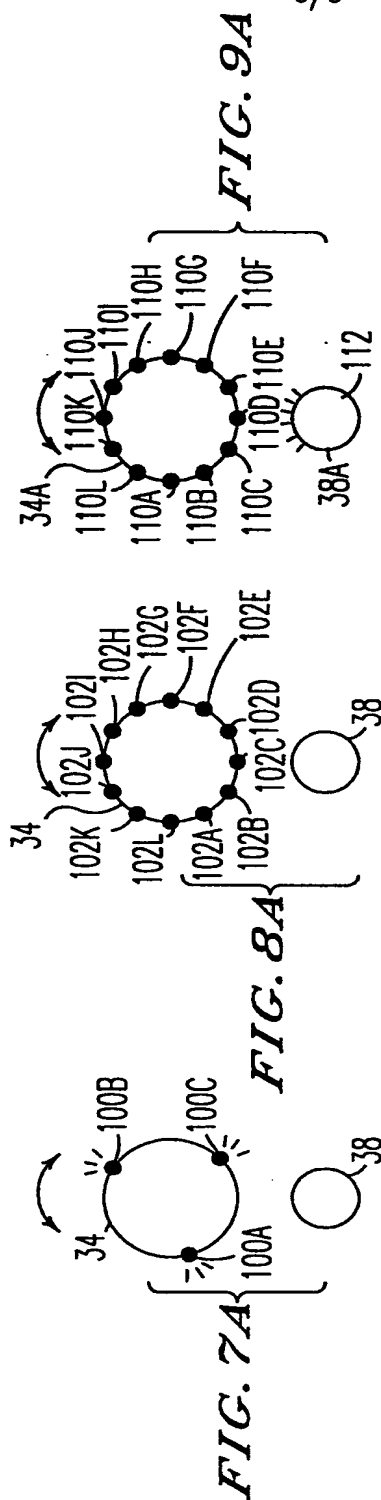plurality of sensors are disposed about the head of a person.

1/3

FIG. 1

FIG. 2

FIG. 3

FIG. 4

ADDR (N+H)
ADDR(N+M)
ADDR (N)
ADDR (N+M+I)

ADDR J
ADDR I

FIG. 5

OFFSET
J

(K>J)

OFFSET
K

ADDR J
ADDR I

FIG. 6

SUBSTITUTE SHEET (RULE 26)

FIG.9A

FIG.9B

FIG.9C

FIG.8A

FIG.8B

FIG.8C

FIG.7A

FIG.7B

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :G09G 3/02
US CL :345/7, 8

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 345/7, 8, 9, 156; 348/77, 121, 142, 699; 434/22, 43, 44, 46, 55, 57; 353/13, 14

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 5,177,872 (LEWIS ET AL) 12 January 1993, col.3, lines 29-53.	1-48
Y	US, A, 4,807,202 (CHERRI ET AL) 21 February 1989, col 4, lines 45-62 and col 5, lines 26-53.	49-78
Y	US, A, 4,984,179 (WALDERN) 08 January 1991, col. 6, lines 64-68 and col. 5, lines 1-64	1-78

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

*	Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A"	document defining the general state of the art which is not considered to be part of particular relevance		
"E"	earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means		
"P"	document published prior to the international filing date but later than the priority date claimed	"&"	document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
17 FEBRUARY 1995	**1 0 MAR 1995**

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer THANH NGUYEN
Facsimile No. (703) 305-3230	Telephone No. (703) 308-6603

Form PCT/ISA/210 (second sheet)(July 1992)★